

FEATURES & SPECIFICATIONS

INTENDED USE

Provides years of maintenance-free illumination for indoor or outdoor use in residential & commercial applications.

CONSTRUCTION

Cast-aluminum housing with corrosion-resistant paint in an industrial grey finish.
Sealed gasket protects against moisture and dust.

OPTICS

4000K CCT LEDs.
Frosted glass diffuser provides even light distribution.

LUMEN MAINTENANCE

The LED will deliver 70% of its initial lumens at 50,000 hour average LED life. See Lighting Facts label on page 2 for performance details.

ELECTRICAL

Driver operates at 120V 60Hz.
Operating temperature -40°C to 40°C.
2.5kV surge protection standard.

INSTALLATION

Mounts to ceiling or wall with recessed junction box (by others) or surface mount junction box (included).

LISTINGS

UL Listed to U.S. and Canadian safety standards for wet locations.
Tested in accordance with IESNA LM-79 and LM-80 standards.

WARRANTY

1-year limited warranty. Complete warranty terms located at:
www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx.

NOTE: Actual performance may differ as a result of end-user environment and application.
All values are design or typical values, measured under laboratory conditions at 25 °C.
Specifications are subject to change without notice.

Catalog Number
Notes
Type




Outdoor General Purpose

OVT LED

LED VAPORTIGHT



Specifications



All dimensions are inches (centimeters).

ORDERING INFORMATION


All configurations of this product are considered "standard" and have short lead times.

Example: OVT LED P1 40K 120 DNA

OVT LED	P1	40K	120	DNA
Series	Performance Package	Color Temperature	Voltage	Finish
OVT LED	P1 800 lumens	40K 4000K*	120 120 volts	DNA Grey

PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Contact Acuity tech support.

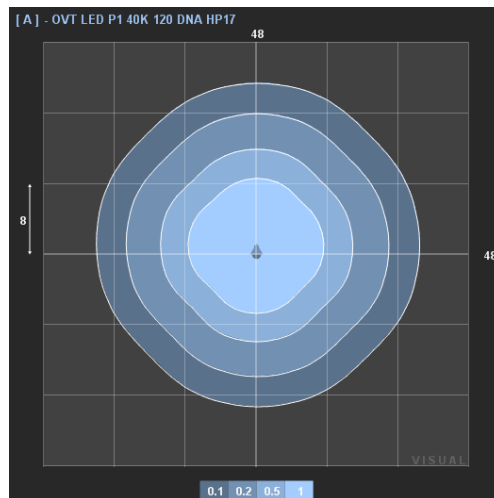

OVT LED

