

Illinois Sports Facilities Authority
200 Level Kitchen Flooring Phase Two
ADDEDNUM NO 01
Rate Field - Chicago, IL
October 23, 2025

Addendum No 01 includes the following:

- Quantities: all indicated quantities are approximate quantities and subject to verification by Bidder.
 - Approximate Area of new flooring (from CAD file): 2,500 SF
 - Approximate Linear Feet of Cove Base (from CAD file): 466 LF
 - New Floor Drain Covers (TBD)
- Temporary Protection
 - Provide walls and dust proof barriers per attached Temp Protection / Access Plan Addendum No 01 dated October 23, 2025
- Removal of plumbing and electrical components to include:
 - Plumbing:
 - Remove all plumbing piping to closest active line and cap.
 - Open site drain and waste line/drain under long table to be removed (see Demo/Removal Plan dated September 29, 2025, rev. for Addendum No 1 dated October 23, 2025) to be converted to floor drains. Match existing floor drain covers.
 - All floor and open site drains to be coordinated with new finish flooring and reset as required.
 - Electrical:
 - Below slab conduit/pathway from electrical box in island table slab to source may remain. All wires to be removed.
 - All electrical cable/wiring to be removed (in knee wall to be demoed) back to source or closest active junction box.

Updated Documents Enclosed:

- Demo/Removal Plan dated September 29, 2025, rev. for Addendum No 1 dated October 23, 2025
- Temp Protection / Access Plan Addendum No 01 dated October 23, 2025


end

ILLINOIS SPORTS FACILITIES AUTHORITY

200 LEVEL KITCHEN FLOORING UPGRADES - PHASE TWO

DEMO / REMOVAL PLAN

SEPTEMBER 29, 2025 rev Add No 01 October 23, 2025

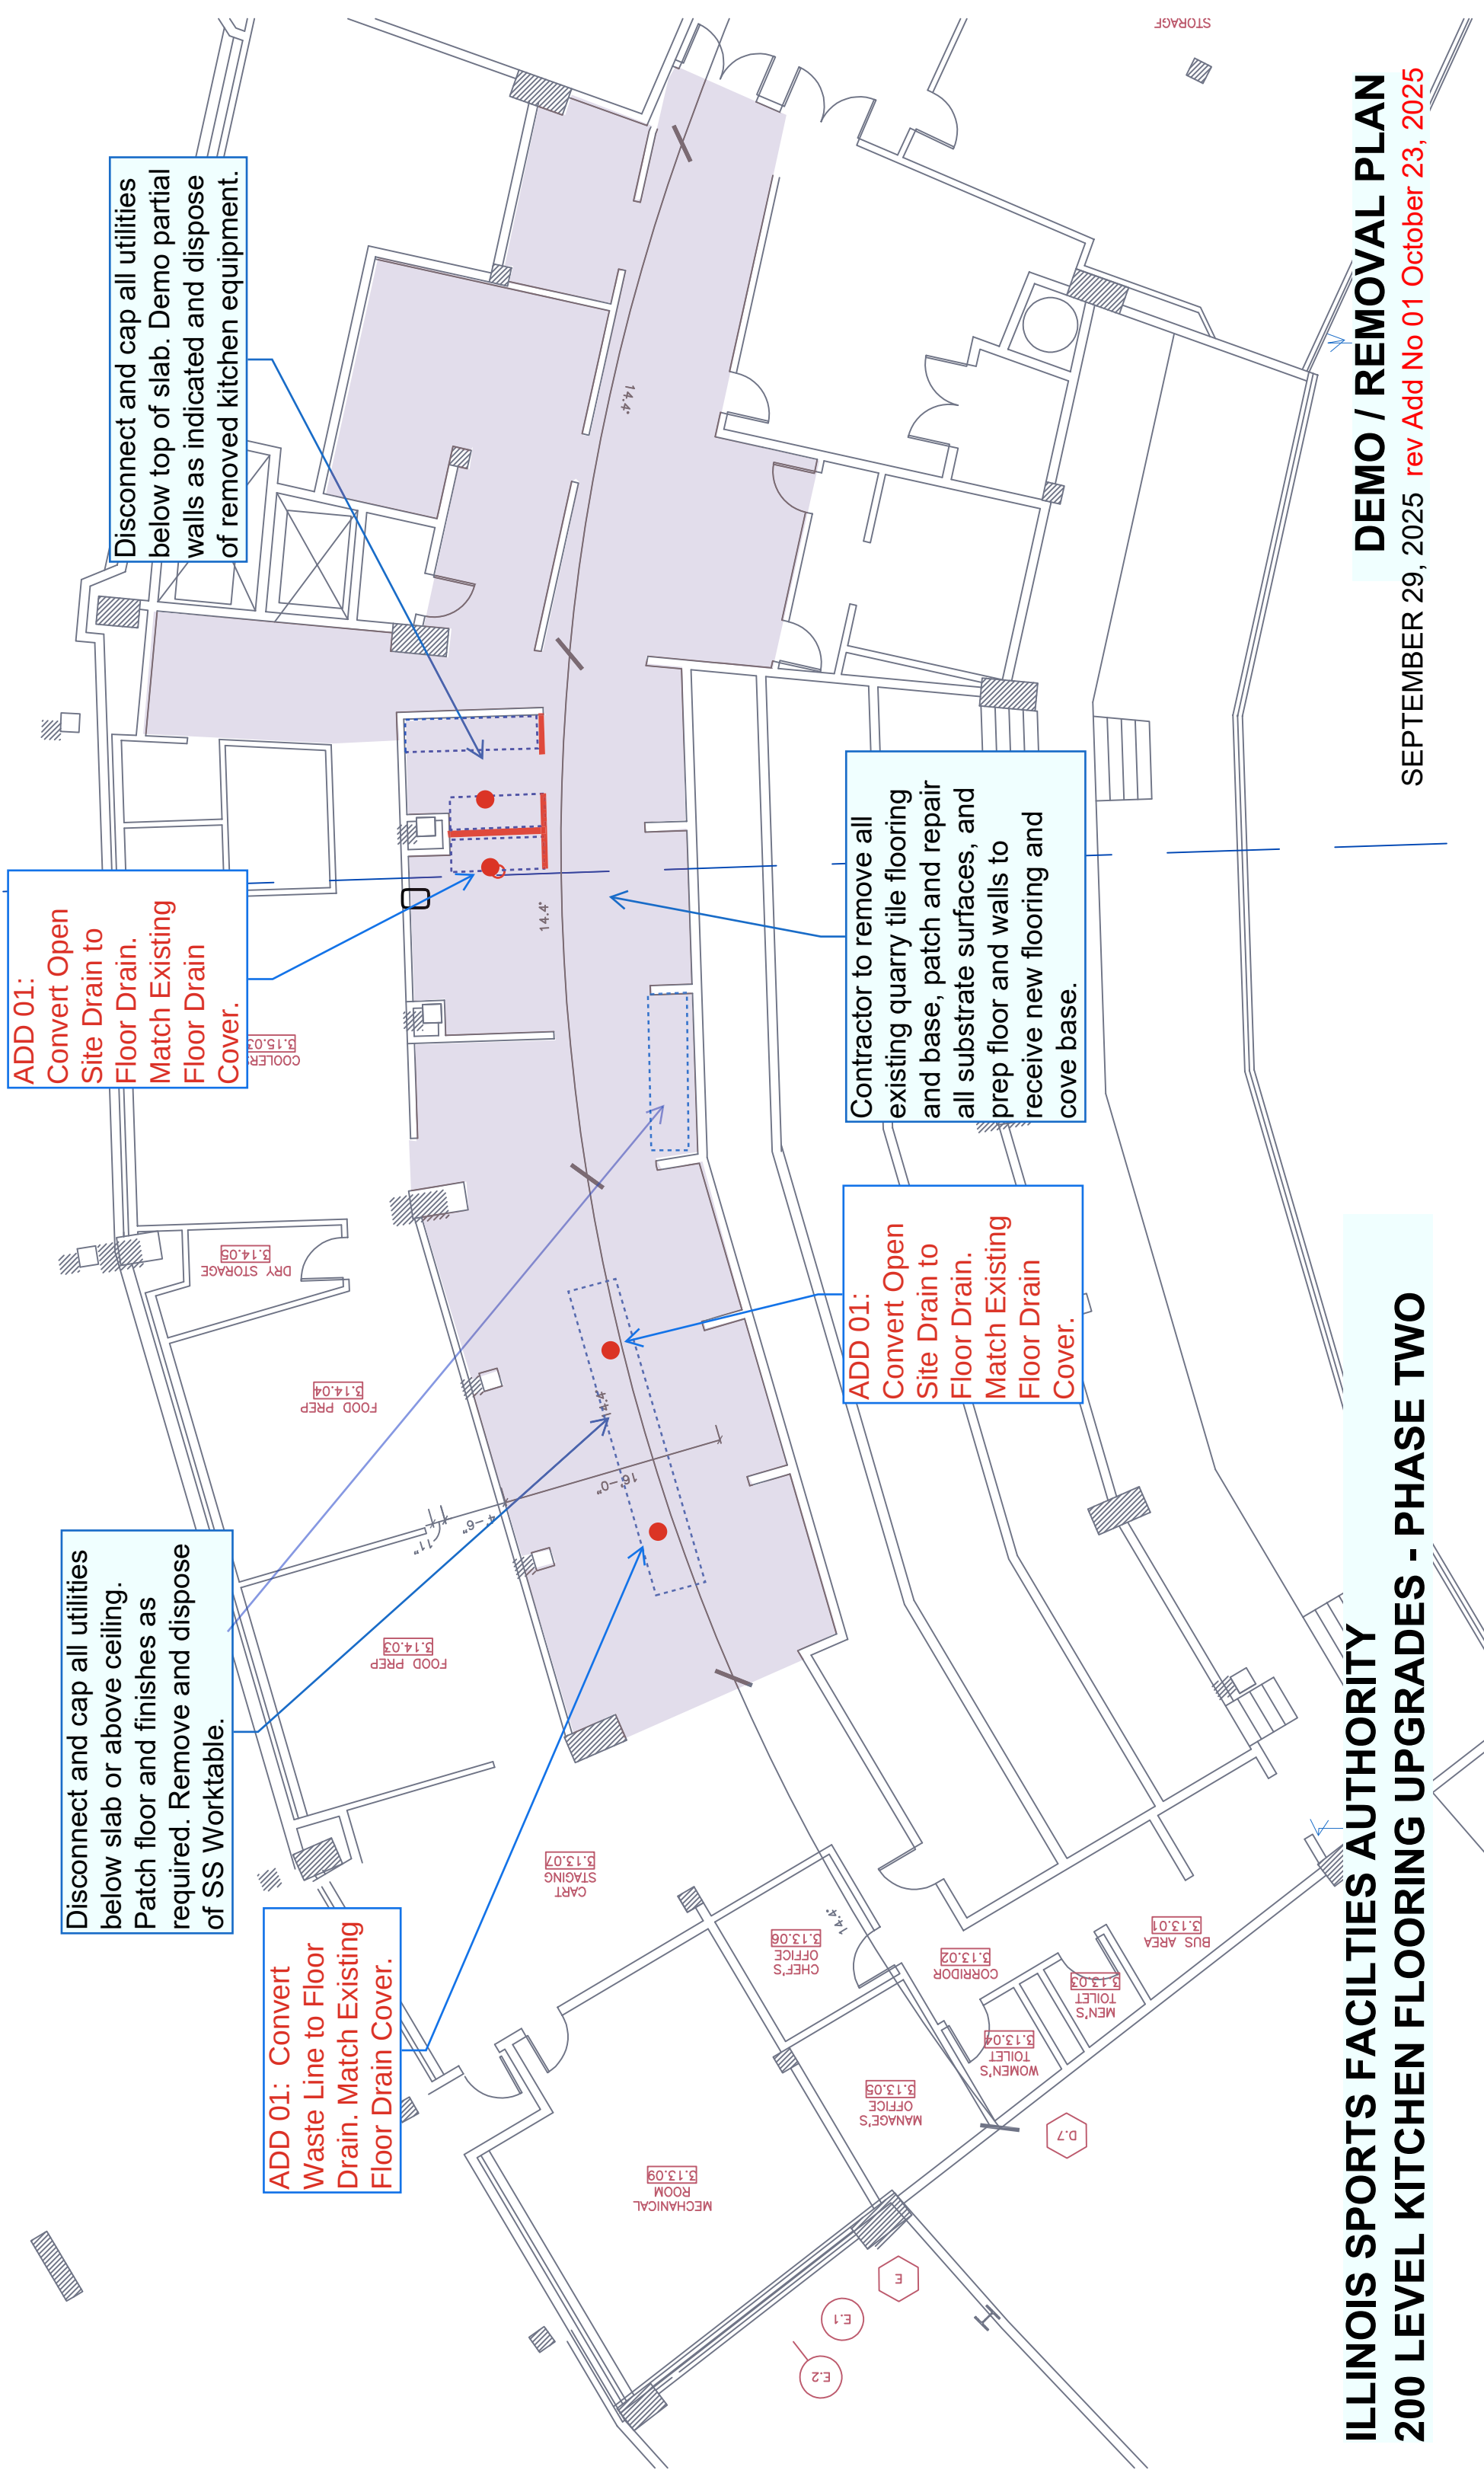

ILLINOIS SPORTS FACILITIES AUTHORITY

200 LEVEL KITCHEN FLOORING UPGRADES - PHASE TWO

TEMP PROTECTION / ACCESS PLAN

Add No 01: October 23, 2025

